



Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor




Flat-II LED panel light is an elegant high-class indoor lighting. The outer frames are Power CCT Size Lumen made of aluminum alloy by anodic oxidation. Lighting source is LED. The lighting design and simple appearance, deluxe and high-class, with good lighting effect. LED panel lamp design is unique, the light passes through the high transmittance of light guide plate after the formation of a uniform plane light effect, good uniformity of illuminance, light and soft, comfortable and also bright, can effectively relieve eye fatigue.

Description

Housing - Sheet Steel of Aluminium
Diffuser - PMMA Polycarbonate Lens
Reflector - Aluminium Reflector
Color Available - White
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC200-240V
Working Temperature - -20C° ~ +50C°
IP Rating - 54
IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-PNL215020	20W	LED	2400lm	A600 X B300mm
LP-PNL215025	25W	LED	3000lm	A600 X B300mm

Photometrics



Technical Drawing



000


Beam Angle



LED CHIP



LED DRIVER

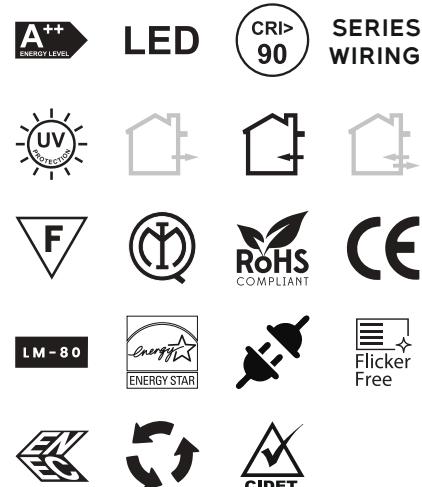

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!


www.lightplus.uk