



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

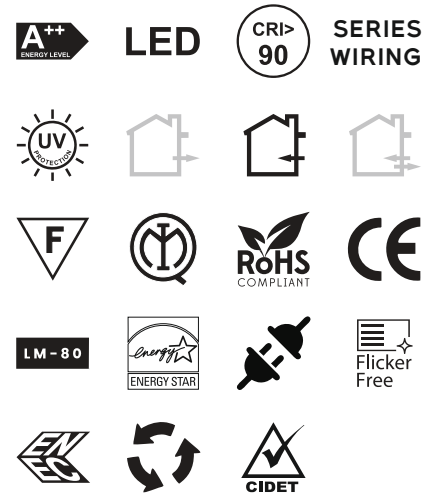

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




Ip65 flexible LED light line with a 8 mm cross section. UV resistance, chemical stability against urban gases and protection against abrasion. Vertical bending only, excellent solution for indoor/outdoor organic facade accent lighting or decorative applications requiring IP65 ingress.

Description

- Housing** - PCB Anti-yellowing & Heat Resisting Silicone Glue
- Diffuser** - Milky White Silicone
- Reflector** - Aluminium Reflector
- Color Available** - Milky
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - 220 ~ AC
- Working Temperature** - -20C° ~ +60C°
- IP Rating** - 67
- IK** - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP+STR-12W	12 W/M	LED	140lm/W	10000 x 11 x 19mm

Photometrics



Technical Drawing

