



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER




The Hero-II light is indirect lighting with louver anti-glare design. Adopt high lumen and special lens which provide high light efficiency and uniform light output. It offers the ideal combination of stylish design and optimum performance for both task and general lighting.


Description

- Housing** - 0.6mm Cold-roll Steel under White Powder Coating
- Diffuser** - High Optical Grade PMMA Opal Diffuser
- Reflector** - Aluminium Reflector
- Color Available** - White
- Lifespan** - >50,000 Hours (L80 B10)
- Voltage** - AC200-240V
- Working Temperature** - -30C° ~ +60C°
- IP Rating** - 54
- IK** - 08


Item Code	Power	Lamp	Lumen	Dimensions
LP-PNL215050	50W	LED	5000lm	A1195 x B595 x C85mm
LP-PNL215055	55W	LED	5500lm	A1195 x B595 x C85mm
LP-PNL215060	60W	LED	6000lm	A1195 x B595 x C85mm
LP-PNL215070	70W	LED	7000lm	A1195 x B595 x C85mm

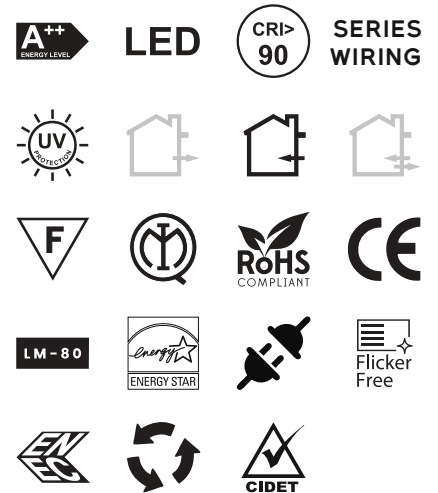

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!

