




The Jet light is direct lighting with louver anti-glare design. Adopt high lumen SMD chip and special lens which provide high light efficiency and uniform light output. It offers the ideal combination of stylish design and optimum performance for both task and general lighting.

Description


Housing - Body Manufactured in Cold-rolled Steel with Durable White Powder Coat Finish
Diffuser - Double PMMA Opal Diffuser in Arc Shape
Reflector - Aluminium Reflector
Color Available - White (other colors available on request)
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC200-240V
Working Temperature - -30°C ~ +60°C
IP Rating - 44
IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-PNL214036	36W	LED	3530lm	A596 x B596 x C70mm
LP-PNL214040	40W	LED	3870lm	A596 x B596 x C70mm
LP-PNL213532	32W	LED	3390lm	A596 x B596 x C85mm
LP-PNL213536	36W	LED	3780lm	A596 x B596 x C85mm
LP-PNL213540	40W	LED	4200lm	A596 x B596 x C85mm

Photometrics

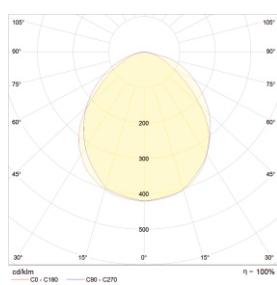

Technical Drawing

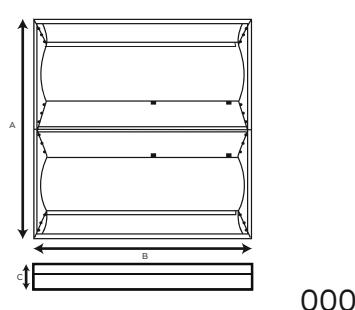

INDOOR LIGHTS JET

PANEL LIGHTS

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk