



### Kelvin

2700K – warm white, similar to incandescent bulb


3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting

5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor

### Beam Angle



Lumi LED Flood Light is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. It has numerous options, including optics for flood or accent lighting, colour temperatures and a choice of RGB, RGBW or RGBA colour mixing as well as various accessories for bracket installation, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

### Description

**Housing** - Die-cast Aluminum

**Diffuser** - Tempered Glass

**Reflector** - Aluminium Reflector

**Color Available** - Gray

**Lifespan** - >50,000 Hours (L90 B10)

**Voltage** - AC220-240V

**Working Temperature** - -25C° ~ +50C°

**IP Rating** - 67

**IK** - 08

### LED CHIP



### LED DRIVER




This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




[www.lightplus.uk](http://www.lightplus.uk)

### Photometrics

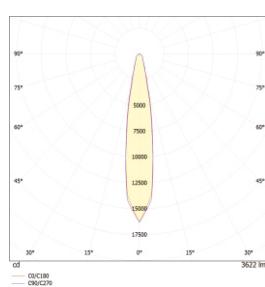

### Technical Drawing

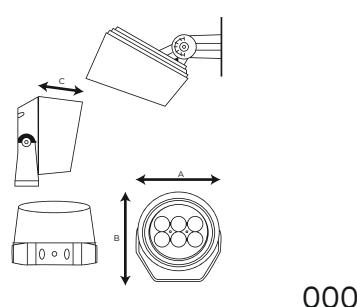

000