




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

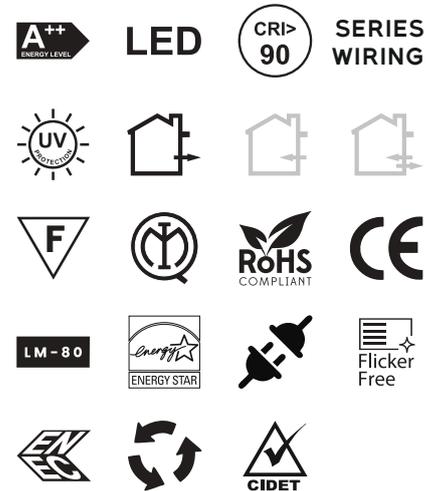

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




Moon-II LED ceiling light, super slim and minimalistic design; it is a faultless combination and deduction of smooth lines, making itself impregnated with ceiling perfectly. Elegant design with soft and even light output realizes a perfect blend of craft and art. High quality PC lamp body promises a higher production efficiency and more stable product quality without any subsequent process. Superior PC diff user with excellent performance, fire rated UL94-V0, aging resistance and yellowing resistance make this ceiling light with longer lifespan.

Description

- Housing** - High quality PC
- Diffuser** - Yellowing resistance PC
- Reflector** - Aluminium Reflector
- Color Available** - White & Black
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -30C° ~ +55C°
- IP Rating** - 54

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODLV18	18W	LED	2160lm	A58 X B300mm
LP-ODLV25	25W	LED	3000lm	A66 X B400mm
LP-ODLV30	30W	LED	3600lm	A66 X B400mm

Photometrics

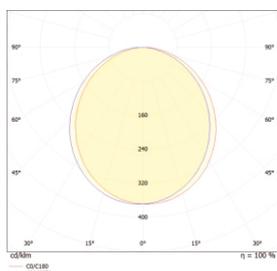

Technical Drawing

