




A total of two different modules are available, which differ significantly in both the characteristics and the height. The modules convince with a high colour consistency and provide a lot of flexibility in lighting planning with at least 3 beam angles. The modules can be combined with different mounting rings to find the perfect solution for the specific room architecture. available in round and square shape.

Description


Housing - Die-casting Aluminum, with White Powder Spraying On The Surface
Diffuser - Lens (Reflector Optional)
Reflector - Aluminium Reflector
Color Available - White
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC220~240V
Working Temperature - -10C° ~ +50C°
IP Rating - 54

Item Code	Power	Lamp	Lumen	Dimensions
LP-SL172210	10W	LED	1200lm	A90 X B90 X C97mm
LP-SL172215	15W	LED	1800lm	A90 X B90 X C97mm

Photometrics

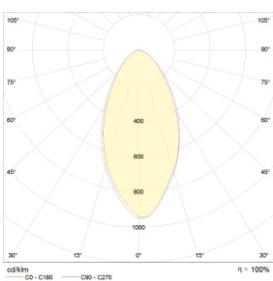


Technical Drawing

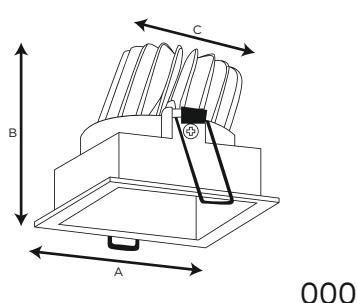

Kelvin

2700K - warm white, similar to incandescent bulb
 3000K - soft white, similar to halogen bulb
 4000K - bright white, similar to fluorescent lighting
 5000K - daylight, very bright & similar to sunlight
 6500K - cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk