




OUTDOOR LIGHTS POINTY

EXTERNAL LIGHTS

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle




Pointy LED slim wall packs deliver full cutoff or semi cutoff light distribution. The innovative pivoting head design aims the light precisely and adjusts up to 20 degrees for forward throw illumination. Suitable for up to 25 foot mounting for applications including pathways, perimeter lighting and building entryways. This LED wall pack fixtures can be mounted on surface/facade, whether you have a new construction or upgrade application.

LED CHIP



LED DRIVER

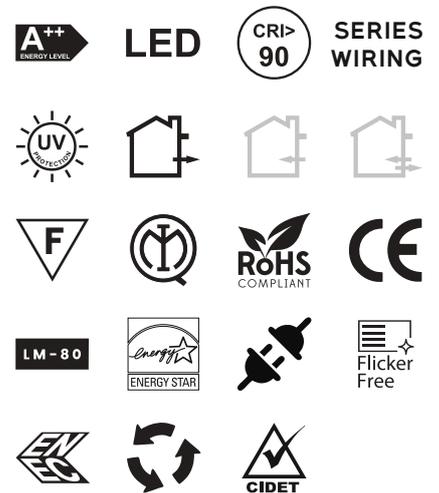


Description


- Housing** - Die-cast Aluminum
- Diffuser** - Glass Diffuser
- Reflector** - Aluminium Reflector
- Color Available** - Black, White & Gray
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC100-277V
- Working Temperature** - -30C° ~ +50C°
- IP Rating** - 65
- IK** - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL375025	25W	LED	3000lm	A223xB193xC114mm
LP-ODL375035	35W	LED	4200lm	A223xB193xC114mm
LP-ODL375070	70W	LED	8400lm	A334xB281xC281mm

Photometrics



Technical Drawing



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!

