




Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

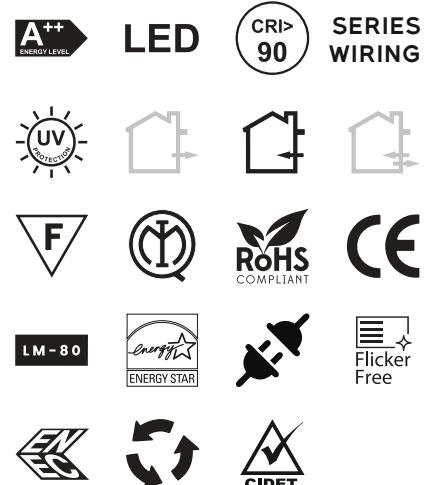

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!


www.lightplus.uk



Prestige Led Track Light with Low voltage DC48V magnetic track light is safe without Electric shock. It has an Aluminum adjustable ring changes the viewing angle. The installation of magnetic track system has several types which can meet different design requirements and is easy to install and move. This magnetic track light has the wide beam angle. Application areas: Retail, office, residential, hotels, restaurants, shopping mall, showroom home, shop etc.

Description

Housing - Aluminium
Diffuser - Polycarbonate Lens.
Reflector - Aluminium Reflector
Color Available - White/Black
Lifespan - >50,000 Hours (L80 B10)
Voltage - AC200-240V
Working Temperature - -30C° ~ +65C°
UGR - <22
MACADAM - <3
IP Rating - 44
IK - 06

Item Code	Power	Lamp	Lumen	Dimensions
LP-TL7012	12W	LED	960lm	A240 X B22 X C54mm
LP-TL7018	18W	LED	1440lm	A355 X B22 X C54mm
LP-TL7030	30W	LED	2400lm	A582 X B22 X C54mm

Photometrics



Technical Drawing

