



Kelvin

2700K – warm white, similar to incandescent bulb
3000K – soft white, similar to halogen bulb
4000K – bright white, similar to fluorescent lighting
5000K – daylight, very bright & similar to sunlight
6000K – cool white, blue tinted, like a monitor




Pure LED Flood Light is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. It has numerous options, including optics for flood or accent lighting, colour temperatures and a choice of RGB, RGBW or RGBA colour mixing as well as various accessories for bracket installation, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Description


Housing - Die-cast Aluminum
Diffuser - Tempered Glass
Reflector - Aluminium Reflector
Color Available - RAL9023 Pearl Dark Gray
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC110-240V
Working Temperature - -10C° ~ +50C°
IP Rating - 66

Item Code	Power	Lamp	Lumen	Dimensions
LP-FL304511	11W	LED	1100lm	A140 x B180 x C130mm
LP-FL304520	20W	LED	2000lm	A140 x B180 x C130mm


Photometrics

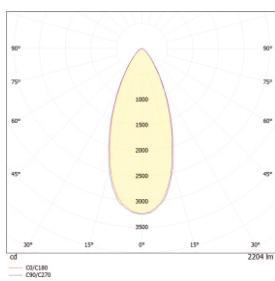

Technical Drawing

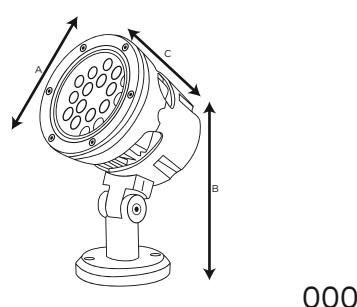

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk