




OUTDOOR LIGHTS ROCK

FLOOD LIGHTS

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle




Rock LED Flood Light is a cost-effective solution, with full range of wattage and optional light distribution, rock is available for multiple applications. Multiple light distributions for different applications even for stadium and billboard. It can also be used as street light with slip fitter mounting accessory.

Description


Housing - Die-cast Aluminum
Diffuser - PMMA with Glass Cover
Reflector - Aluminum Reflector
Color Available - Black, White & Gray
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC220-240V
Working Temperature - -30C° ~ +55C°
IP Rating - 65
IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-FL306150	50W	LED	7250lm	A295 X B217 X C46mm
LP-FL3061100	100W	LED	14500lm	A332 X B263 X C60mm
LP-FL3061150	150W	LED	21750lm	A332 X B263 X C60mm
LP-FL3061200	200W	LED	29000lm	A392 X B315 X C60mm


Photometrics



Technical Drawing

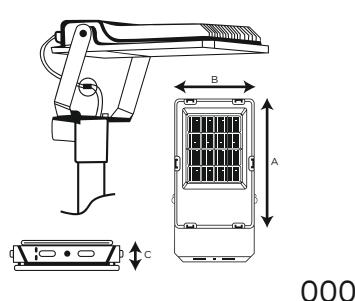

LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk