




Sunny-II LED with easy installation ,this light adopts die-cast aluminum body and 94-v0 fire-rated PC cover ,color changeable function make this bulkhead can change color temperature from warm white to cool white., size 250mmX59mm ,this bulkhead ideal Applications that require continuous light good to provide high bright lighting to stairway, lobby, reception, corridors etc.

Description


- Housing** - Fire Rated -vandal Proof PC
- Diffuser** - 94-v0 Fire-rated PC Diffuser
- Reflector** - Aluminium Reflector
- Color Available** - White
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -10C° ~ +50C°
- IP Rating** - 65
- IK** - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL343018	18W	LED	1800lm	A280 X B280 X C49mm
LP-ODL343025	25W	LED	2500lm	A300 X B300 X C50mm
LP-ODL343030	36W	LED	3000lm	A300 X B300 X C50mm

Photometrics

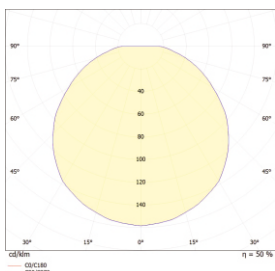

Technical Drawing

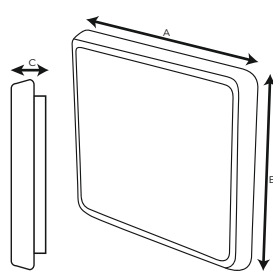

000

OUTDOOR LIGHTS SUNNY II

EXTERNAL LIGHTS

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

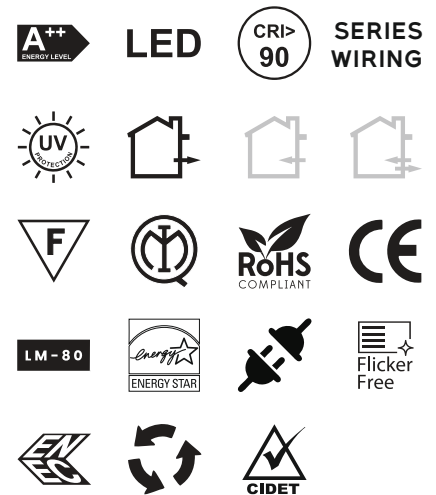

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk