



OUTDOOR LIGHTS TAM II

BOLLARD LIGHTS

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle




LED CHIP

CREE **BRIDGELUX** **PHILIPS**
OSRAM **SAMSUNG**

LED DRIVER

TRIDONIC **PHILIPS**
OSRAM **MEAN WELL**

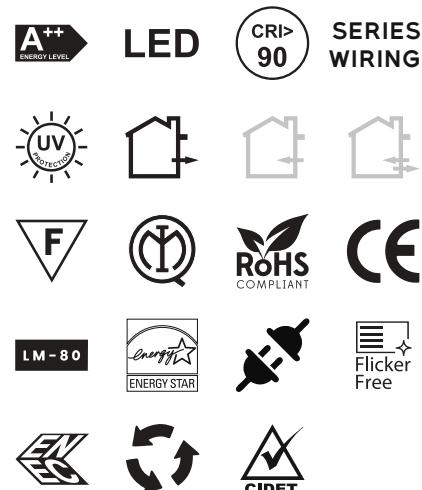

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



Tam-II Light has the classic design of a bollard light, available with little differences in the top shape to satisfy the details lovers. The light source is an LED high efficiency system, which ensures high performances while saving energy. All the items have features like easy installation, very low maintenance needs and full safety for electrical systems and people.

Description

Housing - Body is Die-casting Aluminum Cover, Extruded Aluminum Pole. Finishing Surface Anti-ageing Electrostatic Spray Processing.

Diffuser - PMMA

Reflector - Aluminum Reflector

Color Available - White & Black

Lifespan - >50,000 Hours (L90 B10)


Voltage - AC100~240V

IP Rating - 66


IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL332012-H50	12W	LED	1440lm	A118 X B500mm
LP-BL332012-H80	12W	LED	1440lm	A118 X B800mm

Photometrics



Technical Drawing



000