




Uni LED Spotlight is recessed aluminum spotlight come as IP66 spotlight available in white. This spotlight design has been finished with a special paint treatment to ensure an extra-long lifespan and making it suitable for use under eaves and in water areas such as showers. It features semi anti-glare with a deep positioning and can be installed under insulation using an ICD driver, great thermal management, IP66 waterproof with high protection level, which offers a wider application area.

Description


Housing - Die-cast Aluminum, Powder-coated
Diffuser - Lens (Reflector Optional)
Reflector - Aluminum Reflector
Color Available - White/Black
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC220-240V
Working Temperature - -25C° ~ +50C°
UGR - <19
IP Rating - 66
IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-SL172210	10W	LED	1200lm	A90 X B90 X C97mm
LP-SL172215	15W	LED	1800lm	A90 X B90 X C97mm

Photometrics



Technical Drawing




000

Kelvin

2700K - warm white, similar to incandescent bulb
 3000K - soft white, similar to halogen bulb
 4000K - bright white, similar to fluorescent lighting
 5000K - daylight, very bright & similar to sunlight
 6500K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

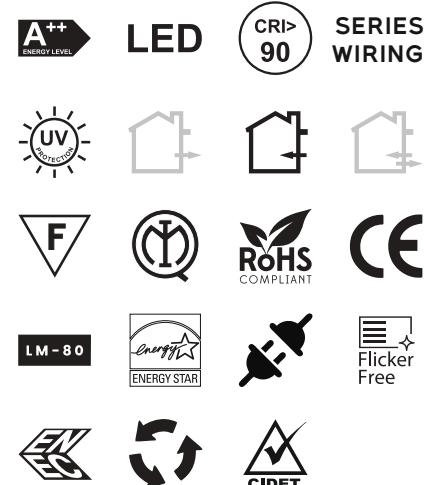

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk