




Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

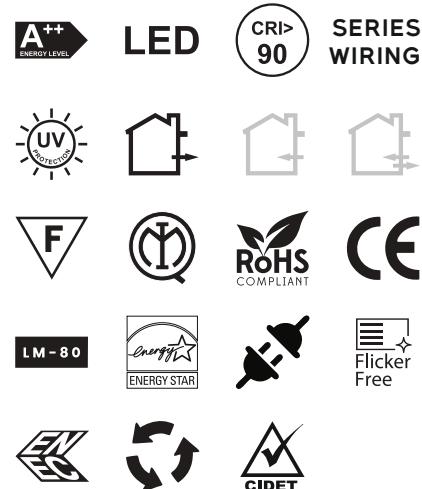

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!


www.lightplus.uk



Roma I is a sleek, cylindrical ceiling down light crafted from durable die-cast aluminum. Its minimalist design makes it's a versatile choice, allowing for easy integration for variety of interior styles. Designed with flexibility in mind, Roma I can be freely configured and matched to suit different environments. Equipped with smart LED technology, Roma I delivers efficient and high quality illumination, making it ideal for wide range of applications, including retail stores, galleries, display areas, workspaces, product inspection zones, and modern living spaces.

Description


Housing - Die cast Aluminum
Diffuser - Clear Glass
Reflector - Aluminium Reflector
Color Available - White & Black
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC220-240V
Working Temperature - -30C° ~ +65C°
IP Rating - 65
IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-ODL242708	08W	LED	9600lm	A70 X B90mm
LP-ODL242712	12W	LED	1440lm	A70 X B90mm
LP-ODL242718	18W	LED	2160lm	A70 X B90mm

Photometrics



Technical Drawing



000