



Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor



Transforming the aesthetics of modern street lighting, this innovative system merges functionality with minimalist design to bring a fresh sense of order to urban spaces. The streamlined structure integrates vertical optical modules into a sleek, cohesive form, delivering exceptional performance across a range of public environments. Specifically designed for versatility, the bollard and pole-mounted luminaires offer ideal solutions for illuminating pathways, building perimeters, parks, and urban squares. Equipped with advanced micro-faceted reflector technology, they ensure superior visual comfort while meeting stringent glare control standards—setting a new benchmark in architectural outdoor lighting.

Description

Housing - Steel

Color Available - Black Baffle, Graphite, Concrete Gray, Clay, Concrete Look, Sand

Voltage - AC220-240V

Working Temperature - -25C° ~ +65C°

Operating Gear - Electronic Converter

Surge Protection - 10 kV

Mounting/Base - Buried Base 0.8m

Weight - 64.3 kg

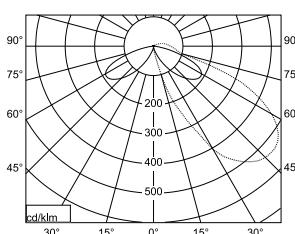
Class - I

IP Rating - 65


IK - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR31703X4.5	3 X 4.5W	LED	931.5lm	AØ114 X B800mm
LP-STR31706X4.5	6 X 4.5W	LED	1863lm	AØ114 X B3000/4000/6000mm
LP-STR317012X4.5	12 X 4.5W	LED	3726lm	AØ114 X B3000/4000/6000mm

Photometrics



Technical Drawing

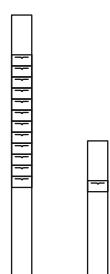

000

LED CHIP



LED DRIVER

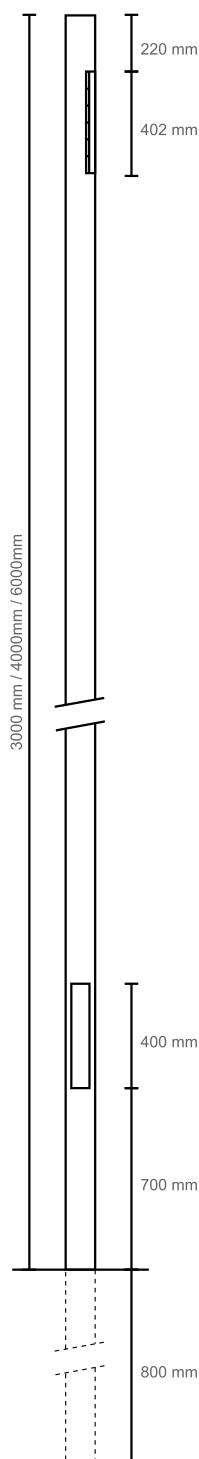




This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk

Dimensions

Column

Bollard

Bollard Base
Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle

- Asymmetric
- Symmetric

LED CHIP

LED DRIVER


A++ ENERGY LEVEL **LED** **CRI > 80** **SERIES WIRING**



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!


www.lightplus.uk