




## OUTDOOR LIGHTS Roady

### STREET LIGHTS

#### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

#### Beam Angle



Roady Street Light fitting for the lighting of roads and cycle-pedestrian paths. Of simple and functional design, it is available in standard version fitted with a virtual midnight self-learning system with possibility of selection among pre-defined programs of power reduction, Roady guarantees the possibility of optimizing the quantity of light according to project requirements and operating mode. Pressing the screws, that guarantee the tightness of the product, the cover on which the LED modules are attached is released. The finish is accessible in the RAL colors requested by client.

#### Description

**Housing** - Die Cast Aluminum

**Diffuser** - Polycarbonate Lenses with Tempered Glass

**Color Available** - Silver & Grey

**Lifespan** - >100,000 Hours (L70 B10)

**Voltage** - AC110-277V


**Working Temperature** - -30° ~ +60°C

**IP Rating** - 67


**IK** - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR311530	30W	LED	4500lm	A555 X B200 X C105 mm
LP-STR311550	50W	LED	7500lm	A555 X B200 X C105 mm
LP-STR3115100	100W	LED	15000lm	A615 X B233 X C100 mm
LP-STR3115120	120W	LED	18000lm	A615 X B233 X C100 mm
LP-STR3115150	150W	LED	22500lm	A675 X B260 X C100 mm
LP-STR3115200	200W	LED	30000lm	A675 X B260 X C100 mm
LP-STR3115250	250W	LED	37500lm	A675 X B260 X C100 mm

#### Photometrics



#### Technical Drawing




000

#### LED CHIP



#### LED DRIVER

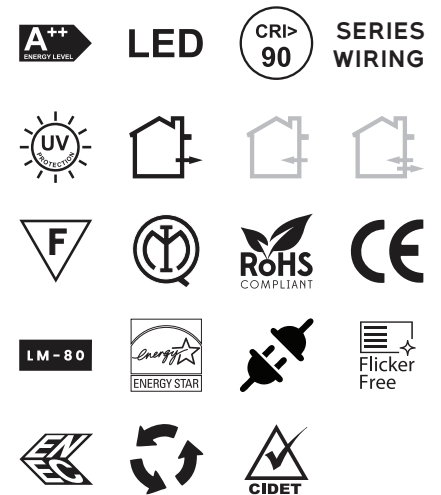

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)