



## OUTDOOR LIGHTS ASHFORD

### BOLLARD LIGHTS



#### Kelvin

2700K – warm white, similar to incandescent bulb  
 3000K – soft white, similar to halogen bulb  
 4000K – bright white, similar to fluorescent lighting  
 5000K – daylight, very bright & similar to sunlight  
 6000K – cool white, blue tinted, like a monitor



15568443 UK00004047514

Purpose-built LED bollard for parks, promenades, and community walkways. The sealed light engine provides consistent output with low energy use. Multiple height and distribution choices allow spacing flexibility. Optional photocell or motion activation supports adaptive lighting and energy savings.

#### Description

**Housing** - Die-Cast Aluminum and Extruded Aluminum Pole

**Diffuser** - Clear PC

**Color Available** - Black & Grey

**Lifespan** - >50,000 Hours (L90 B10)

**Voltage** - AC220-240V


**Working Temperature** - -20C° ~ +65C°

**IP Rating** - 54


**IK** - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL33502X6	2x6W	LED	2*436lm	A300 X B120 X C400 mm
				A300 X B120 X C650 mm
				A300 X B120 X C800 mm

#### Photometrics



#### Technical Drawing

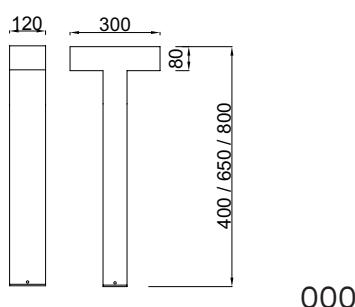

#### Beam Angle

120°

#### LED CHIP

**CREE** **BRIDGELUX** **PHILIPS**  
**OSRAM** **SAMSUNG**

#### LED DRIVER

**TRIDONIC** **PHILIPS**  
**OSRAM** **MEAN WELL**



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)