



LED street luminaire optimized for low maintenance. The sealed light engine resists contamination, reducing lumen depreciation from dirt. Smart-ready sockets and drivers support future controls without redesign.

Description

Housing - Die Cast Aluminum
Diffuser - Opal PC
Color Available - Grey
Lifespan - >50,000 Hours (L70 B10)
Voltage - AC220-240V
Working Temperature - -20° ~ +65°C
IP Rating - 65
IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR317930	30W	LED	2308lm	AØ520 X B362 mm
LP-STR317945	45W	LED	3325lm	AØ520 X B362 mm
LP-STR317960	60W	LED	4015lm	AØ520 X B362 mm
LP-STR317980	80W	LED	5044lm	AØ520 X B362 mm



000

OUTDOOR LIGHTS AURORA

STREET LIGHTS

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

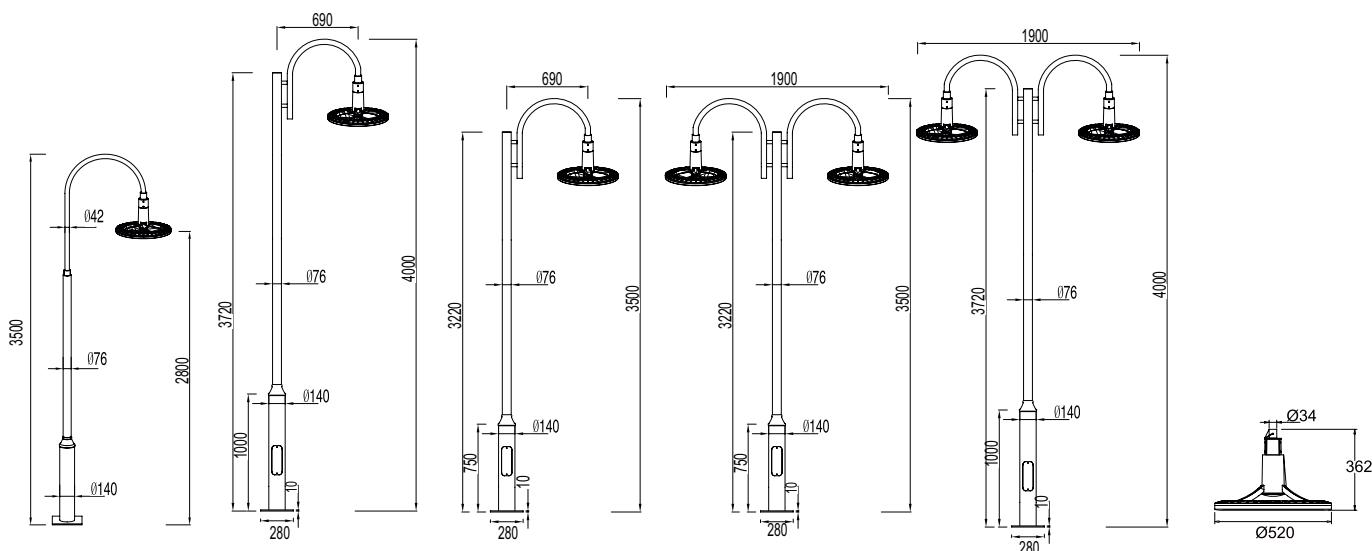

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



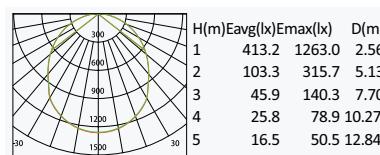
www.lightplus.uk


Kelvin

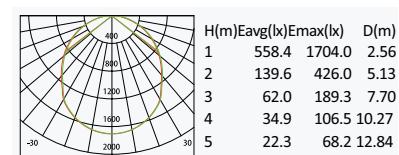
2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Technical Drawing

Photometrics


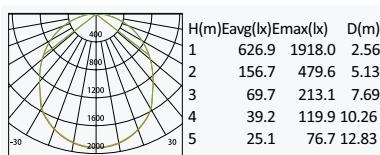
MTC LED 30W 2308lm
 Opal PC
 104.19°
 Class I, IP65



Lumileds LED 45W 3325lm
 Opal PC
 104.19°
 Class I, IP65



Lumileds LED 60W 4015lm
 Opal PC
 104.19°
 Class I, IP65



Lumileds LED 80W 5044lm
 Opal PC
 104.19°
 Class I, IP65