



Kelvin

2700K – warm white, similar to incandescent bulb

3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting

5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor



A versatile street luminaire that balances cost, output, and longevity. Precision lenses shape the beam for local streets, collectors, and pathways. Tool-free latching and a hinged gear tray make servicing straightforward.

Description

Housing - Die Cast Aluminum, Extruded Aluminum Pole

Diffuser - Clear PC

Color Available - Black

Lifespan - >50,000 Hours (L70 B10)

Voltage - AC220-240V

Working Temperature - -20° ~ +65°C

IP Rating - 65

IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318215	15W	LED	990lm	AØ180 mm
LP-STR318230	30W	LED	2344lm	A250 * B250 mm
LP-STR318250	50W	LED	3981lm	A250 * B250 mm

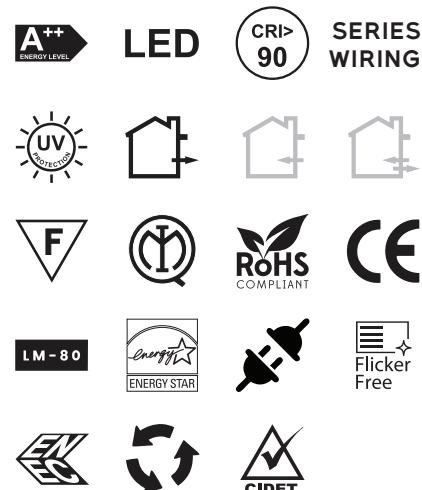
Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



000


Kelvin

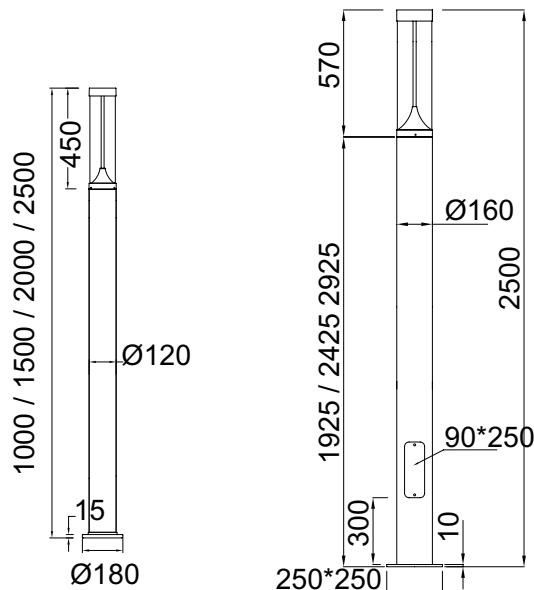
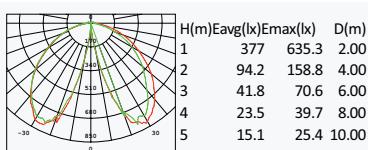
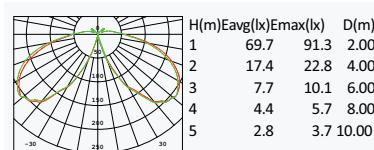
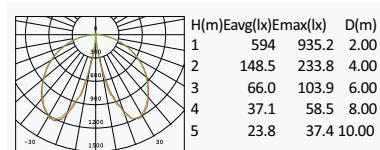
2700K – warm white, similar to incandescent bulb

3000K – soft white, similar to halogen bulb

4000K – bright white, similar to fluorescent lighting

5000K – daylight, very bright & similar to sunlight

6000K – cool white, blue tinted, like a monitor

Technical Drawing

Photometrics

 Lumileds 30W 2344lm
 Clear PC
 90°
 Class I, IP65

 Lumileds 15W 990lm
 Clear PC
 90°
 Class I, IP65

 Lumileds 50W 3981lm
 Clear PC
 90°
 Class I, IP65