



### Kelvin

2700K – warm white, similar to incandescent bulb  
 3000K – soft white, similar to halogen bulb  
 4000K – bright white, similar to fluorescent lighting  
 5000K – daylight, very bright & similar to sunlight  
 6000K – cool white, blue tinted, like a monitor

### Beam Angle




### LED CHIP

**CREE** **BRIDGELUX** **PHILIPS**  
**OSRAM** **SAMSUNG**

### LED DRIVER

**Light Plus** **TRIDONIC** **PHILIPS**  
**OSRAM** **MEAN WELL**

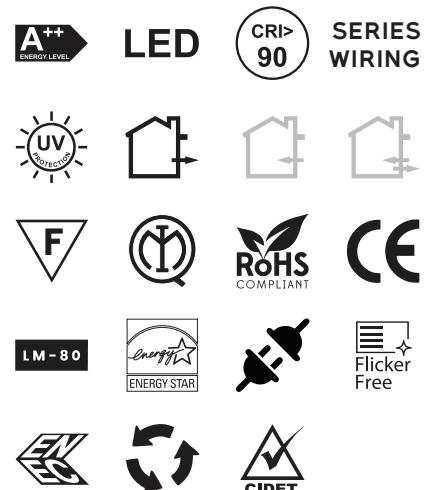

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)




The Guita LED garden spike lights are timeless in design and fit into any outdoor environment. LED spike are LED lights that are placed in the ground with fixture above the ground. This is fully visible and can be tilted, so that the direction of the light beam can be adjusted. The LED spike lights can insert in the ground mounted, so you can use them as outdoor spotlights for the yard, highlighting trees, pathways, and other features with their bright LED illumination, or use them as a garage lights, wall lights.

### Description

**Housing** - Die Cast Aluminum  
**Diffuser** - Clear/Frosted glass  
**Reflector** - Aluminium Reflector  
**Color Available** - Any RAL Color  
**Lifespan** - >50,000 Hours (L90 B10)  
**Voltage** - AC100 ~ 240V  
**Working Temperature** - -20°C ~ +65°C  
**IP Rating** - 67  
**IK** - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-SKL406007	07W	LED	840lm	A80 X B50 X C210mm
LP-SKL406009	09W	LED	1080lm	A80 X B50 X C210mm
LP-SKL406015	15W	LED	1800lm	A110 X B75 X C20mm

### Photometrics



### Technical Drawing

