



Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor



A versatile LED bollard with a restrained form factor. The light engine offers high efficacy and long service life with integral driver. Choose from forward-throw or symmetrical light patterns to optimize spacing. Hardware is stainless steel, and finishes are offered in standard architectural colors.

Description

Housing - Die-Cast Aluminum and Extruded Aluminum Pole

Diffuser - Clear Glass

Color Available - Black & Grey

Lifespan - >50,000 Hours (L90 B10)

Voltage - AC220-240V


Working Temperature - -20C° ~ +65C°

IP Rating - 65


IK - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL335710	10W	LED	348lm	A120 X B450 mm A120 X B650 mm A120 X B800 mm A120 X B1000 mm
LP-BL335715	15W	LED	536lm	A120 X B850 mm A120 X B1000 mm A120 X B1200 mm

Photometrics

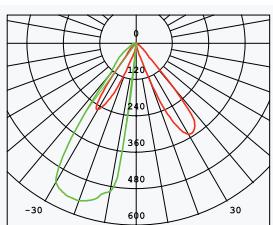

Technical Drawing

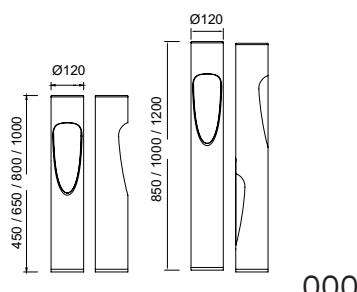

Beam Angle


29° 30°

LED CHIP

CREE **BRIDGELUX** **PHILIPS**
OSRAM **SAMSUNG**

LED DRIVER

TRIDONIC **PHILIPS**
OSRAM **MEAN WELL**

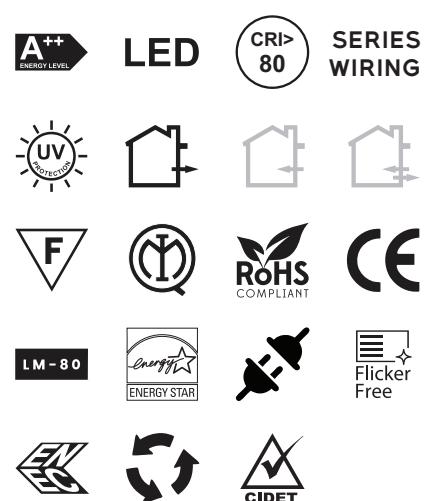

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk