


STREET LIGHTS



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

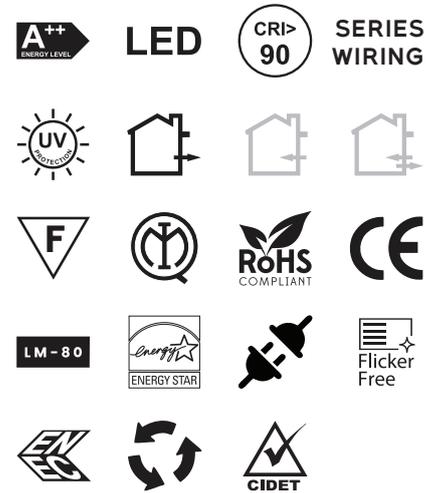

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



A street light focused on comfort and compliance. Batwing optics deliver even horizontal illumination and clear verticals for recognition. The neutral form complements both modern and traditional poles.

Description

- Housing - Die Cast Aluminum
- Diffuser - Clear PC
- Color Available - Grey
- Lifespan - >50,000 Hours (L70 B10)
- Voltage - AC220-240V
- Working Temperature - -20° ~ +65°C
- IP Rating - 65
- IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318025	25W	LED	3122lm	A635 X B310 X C200mm
LP-STR318055	55W	LED	4501lm	A635 X B310 X C200mm
LP-STR318065	65W	LED	E27	A635 X B310 X C200mm
LP-STR318070	70W	LED	5858lm	A635 X B310 X C200mm







Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Technical Drawing

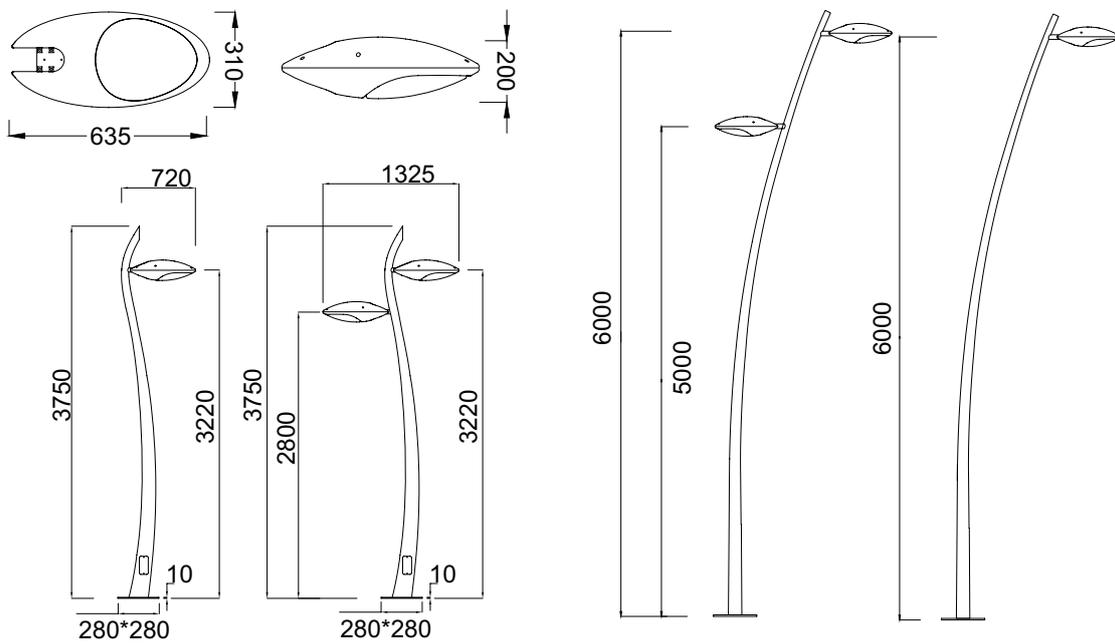


Photometrics

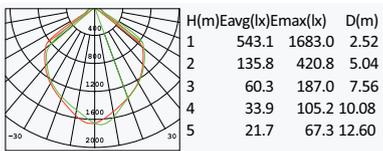

Lumileds LED 25W 3122lm
 Ribbed clear PC
 103.12°
 Class I, IP65

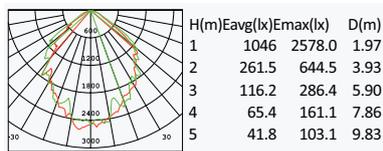

CREE LED 55W 4501lm
 Ribbed clear PC
 89°
 Class I, IP65

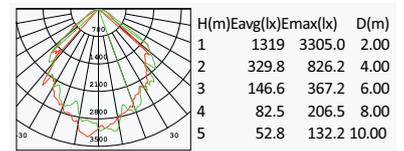

CREE LED 70W 5858lm
 Ribbed clear PC
 89.99°
 Class I, IP65