



Lincoln LED Street light with a quiet, modern form. The sealed module achieves consistent performance in dusty or humid environments. Dimming options and controls support energy savings during low-traffic periods.

## Description

**Housing** - Stainless Steel and Extruded Aluminum Body

**Diffuser** - Clear PMMA

**Color Available** - Black & Grey

**Lifespan** - >50,000 Hours (L70 B10)

**Voltage** - AC220-240V

**Working Temperature** - -20° ~ +65°C

**IP Rating** - 65

**IK** - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR319715	15W	LED	1234lm	A200 X B200 mm
LP-STR319730	30W	LED	2807lm	A250 X B250 mm



000

## OUTDOOR LIGHTS LINCOLN

### STREET LIGHTS

### Kelvin

2700K - warm white, similar to incandescent bulb

3000K - soft white, similar to halogen bulb

4000K - bright white, similar to fluorescent lighting

5000K - daylight, very bright & similar to sunlight

6000K - cool white, blue tinted, like a monitor

### Beam Angle



### LED CHIP



### LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




[www.lightplus.uk](http://www.lightplus.uk)




### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


## Technical Drawing

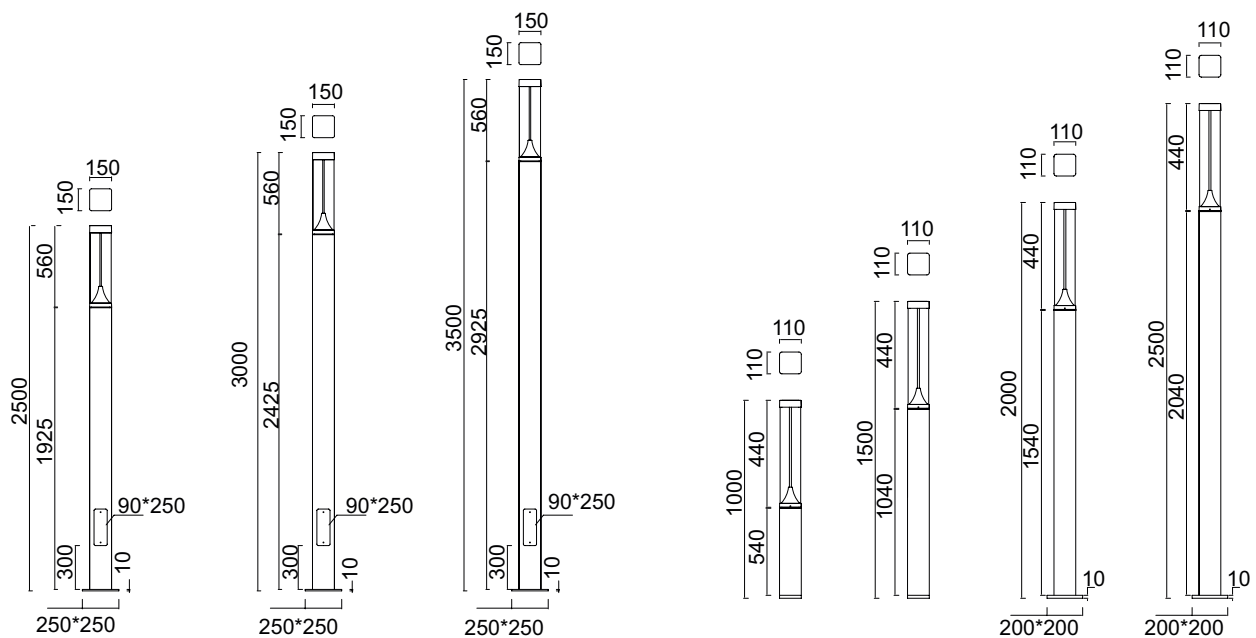

## Photometrics

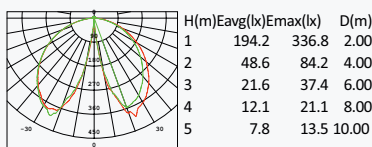

Lumileds 3030 LED 1234lm  
Clear PMMA  
100°  
Class I, IP65

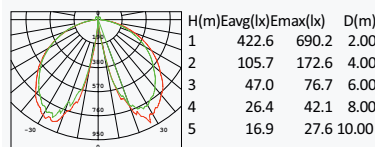

Lumileds 3030 LED 2807lm  
Clear PMMA  
100°  
Class I, IP65