



OUTDOOR LIGHTS LUTON

BOLLARD LIGHTS



Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle




LED CHIP

CREE **BRIDGELUX** **PHILIPS**
OSRAM **SAMSUNG**

LED DRIVER

TRIDONIC **PHILIPS**
OSRAM **MEAN WELL**

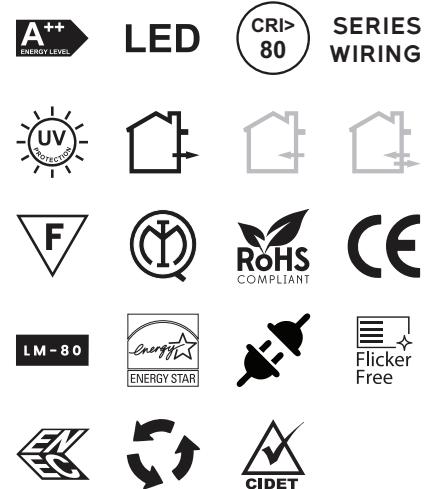

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk




A versatile LED bollard with a restrained form factor. The light engine offers high efficacy and long service life with integral driver. Choose from forward-throw or symmetrical light patterns to optimize spacing. Hardware is stainless steel, and finishes are offered in standard architectural colors.

Description


Housing - Die-Cast Aluminum and Extruded Aluminum Pole
Diffuser - Opal PC
Color Available - Black & Grey
Lifespan - >50,000 Hours (L90 B10)
Voltage - AC220-240V
Working Temperature - -20C° ~ +65C°
IP Rating - 65
IK - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL336208	08W	LED	E27	A120 X B120 X C400 mm
				A120 X B120 X C650 mm
				A120 X B120 X C800 mm
LP-BL336260	60W	LED	E27	A120 X B120 X C400 mm
				A120 X B120 X C650 mm
				A120 X B120 X C800 mm

Photometrics



Technical Drawing

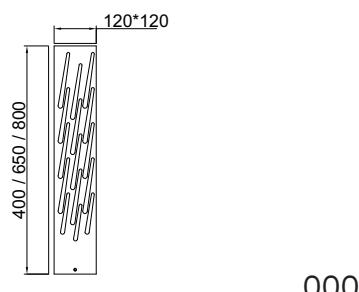

000