



A roadway fixture focused on visual comfort and uniformity. The flat glass and internal baffles reduce high-angle brightness, improving night-time visibility. Pre-wired terminal blocks and captive screws speed up installation.

Description

Housing - Die Cast Aluminum
Diffuser - Opal PC
Color Available - Black & Grey
Lifespan - >50,000 Hours (L70 B10)
Voltage - AC220-240V
Working Temperature - -20° ~ +65°C
IP Rating - 65
IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR318860	60W	LED	4*1003lm	A1300 X B565 X C1880 mm
LP-STR318890	90W	LED	6*1003lm	A1550 X B675 X C1780 mm
LP-STR3188180	180W	LED	9*1262lm	A2130 X B790 X C1980 mm
LP-STR3188220	220W	LED	11*1262lm	A2130 X B790 X C2215 mm



Kelvin

2700K - warm white, similar to incandescent bulb
 3000K - soft white, similar to halogen bulb
 4000K - bright white, similar to fluorescent lighting
 5000K - daylight, very bright & similar to sunlight
 6000K - cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




www.lightplus.uk




Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Technical Drawing

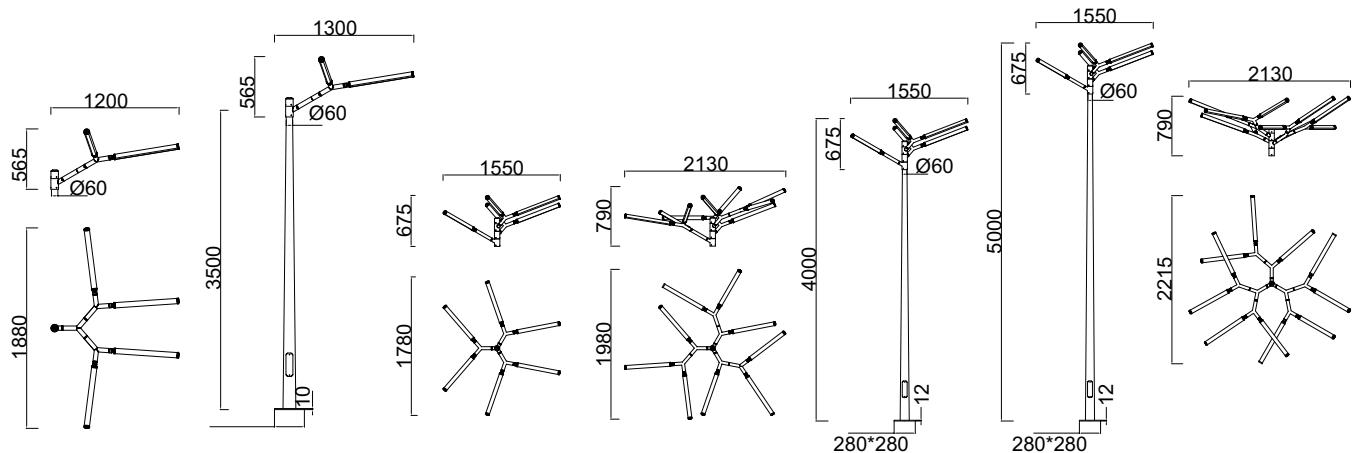

Photometrics

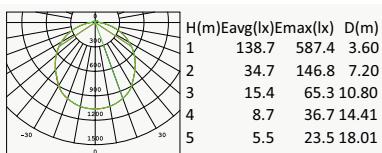

MTC 2835 LED 60W 4*1003lm
 Opal PC Lens
 120°
 Class I, IP65