



## OUTDOOR LIGHTS REGENT

### STREET LIGHTS

#### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


#### Beam Angle



#### LED CHIP



#### LED DRIVER

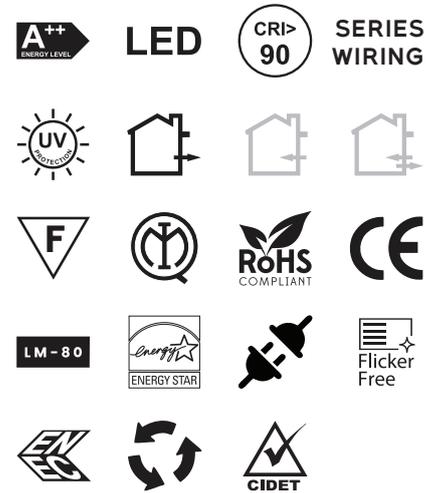

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)



LED street luminaire optimized for low maintenance. The sealed light engine resists contamination, reducing lumen depreciation from dirt. Smart-ready sockets and drivers support future controls without redesign.

#### Description

- Housing - Die Cast Aluminum
- Diffuser - Opal PC
- Color Available - Grey
- Lifespan - >50,000 Hours (L70 B10)
- Voltage - AC220-240V
- Working Temperature - -20° ~ +65°C
- IP Rating - 65
- IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR317830	30W	LED	2308lm	AØ520 mm
LP-STR317845	45W	LED	3325lm	AØ520 mm
LP-STR317860	60W	LED	4015lm	AØ520 mm
LP-STR317880	80W	LED	5044lm	AØ520 mm







### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


### Technical Drawing

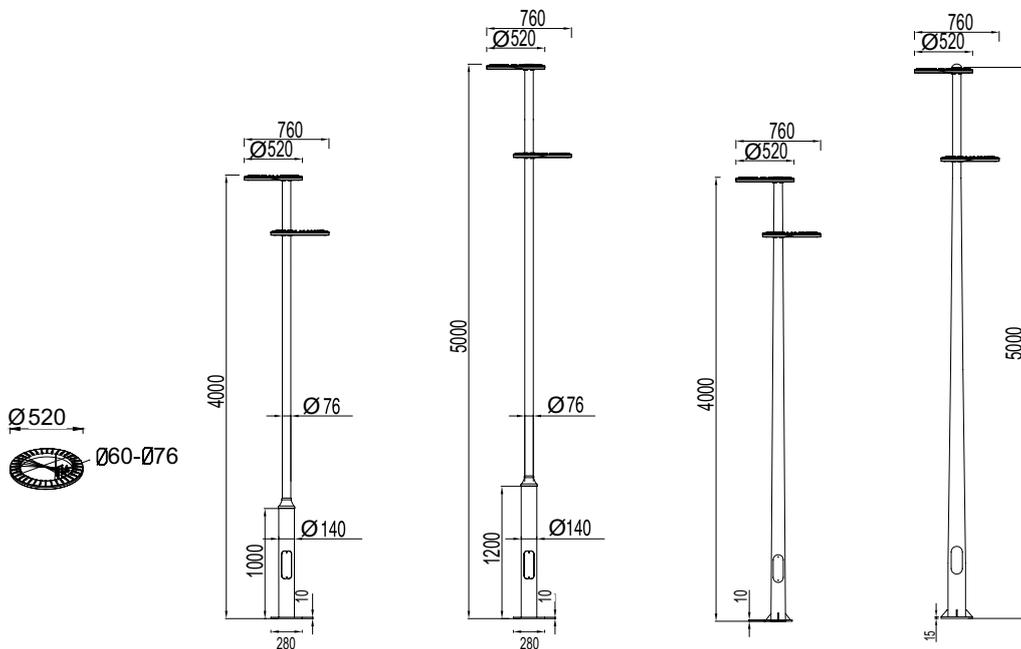


### Photometrics

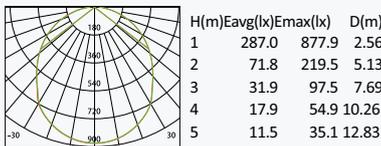


MTC LED 30W 2308lm  
Opal PC  
104.19°  
Class I, IP65

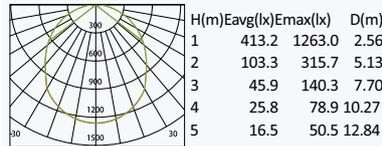

Lumileds LED 45W 3325lm  
Opal PC  
104.19°  
Class I, IP65

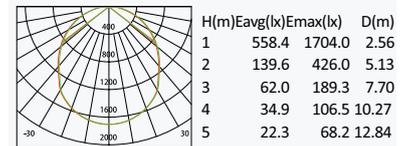

Lumileds LED 60W 4015lm  
Opal PC  
104.19°  
Class I, IP65

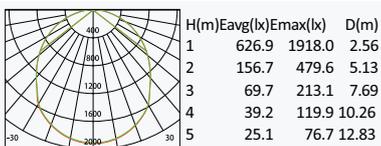

Lumileds LED 80W 5044lm  
Opal PC  
104.19°  
Class I, IP65