



Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

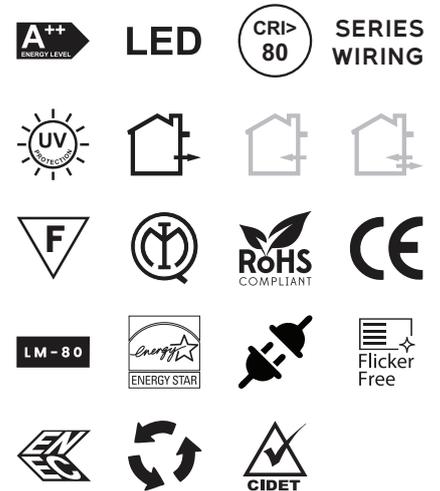

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




An architectural LED bollard that balances performance and durability. The finless, die-cast body manages heat effectively and keeps the profile simple. Optical choices include opal for diffuse light or clear with internal baffles for greater visual control. Rated IP65 and IK10, with tamper-resistant fixings for public spaces.

Description

- Housing** - Die-Cast Aluminum and Extruded Aluminum Pole
- Diffuser** - Clear PC
- Color Available** - Black & Grey
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220-240V
- Working Temperature** - -20C° ~ +65C°
- IP Rating** - 44
- IK** - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL334710	10W	LED	402lm	AØ250 X B650 mm
LP-BL334720	20W	LED	402lm	AØ250 X B800 mm
LP-BL334725	25W	LED	600lm	AØ250 X B1000 mm

Photometrics

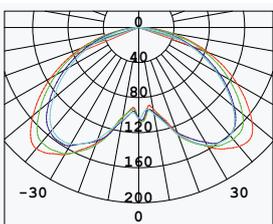

Technical Drawing

