




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

Beam Angle



Performance-driven LED street light for major and minor roads. Optical choices provide sharp cut-off and wide coverage where needed. Surge protection and robust sealing support dependable operation in challenging environments.

LED CHIP



LED DRIVER



Description

- Housing** - Die-Casting Aluminum Body
- Diffuser** - Clear PC
- Color Available** - Black & Grey
- Lifespan** - >50,000 Hours (L70 B10)
- Voltage** - AC220~240V
- Working Temperature** - -20° ~ +65°C
- IP Rating** - 65
- IK** - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-STR320530	30W	LED	4361lm	A581 X B238 X C112 mm
LP-STR320555	55W	LED	7996lm	A581 X B238 X C112 mm
LP-STR320580	80W	LED	11521lm	A581 X B238 X C112 mm
LP-STR3205100	100W	LED	14538lm	A581 X B238 X C112 mm
LP-STR3205120	120W	LED	17959lm	A689 X B281 X C113 mm
LP-STR3205150	150W	LED	22383lm	A689 X B281 X C113 mm
LP-STR3205180	180W	LED	25309lm	A816 X B337 X C114 mm
LP-STR3205200	200W	LED	33223lm	A816 X B337 X C114 mm
LP-STR3205240	240W	LED	34892lm	A917 X B337 X C114 mm
LP-STR3205300	300W	LED	38623lm	A917 X B337 X C114 mm
LP-STR3205400	400W	LED	58153lm	A1016 X B390 X C119 mm



000



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!




www.lightplus.uk




Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Technical Drawing

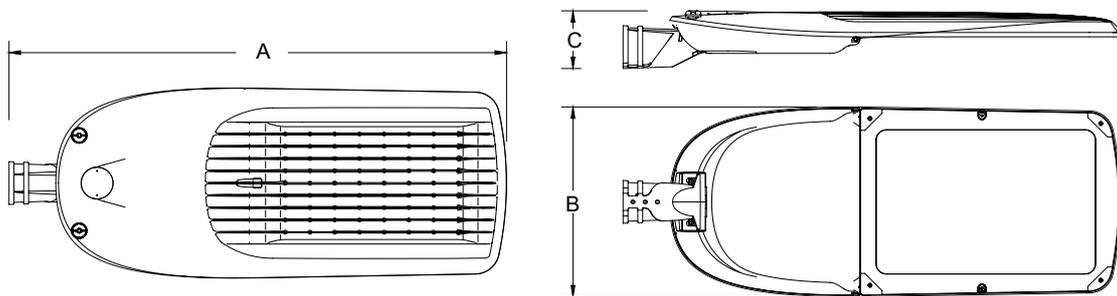


Photometrics




Lumileds LED 55W 7996lm
Clear Glass
161°
Class I, IP65




Lumileds LED 80W 11521lm
Clear Glass
147°
Class I, IP65




Lumileds LED 120W 17959lm
Clear Glass
148°
Class I, IP65




Lumileds LED 150W 22383lm
Clear Glass
148°
Class I, IP65



Lumileds LED 180W 25309lm
Clear Glass
148°
Class I, IP65



Lumileds LED 200W 33223lm
Clear Glass
148°
Class I, IP65



Lumileds LED 300W 38623lm
Clear Glass
162°
Class I, IP65