




This LED bollard delivers comfortable pathway lighting with restrained glare and clean cut-off. The sealed optic and weather-rated gaskets keep moisture and dust out. Offered with symmetric or forward-throw distributions to keep light where it is needed. Root or surface mounting options simplify installation on new builds or refurbishment.

Description


- Housing** - Die-Cast Aluminum and Extruded Aluminum Pole
- Diffuser** - Frosted Glass
- Color Available** - Black & Grey
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220~240V
- Working Temperature** - -20C° ~ +65C°
- IP Rating** - 54
- IK** - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL334506	06W	LED	170lm	A120 X B80 X C400 mm A120 X B80 X C650 mm A120 X B80 X C800 mm
LP-BL334510	10W	LED	170lm	A120 X B80 X C400 mm A120 X B80 X C650 mm A120 X B80 X C800 mm

Photometrics



Technical Drawing



OUTDOOR LIGHTS THAMES

BOLLARD LIGHTS

Kelvin

- 2700K - warm white, similar to incandescent bulb
- 3000K - soft white, similar to halogen bulb
- 4000K - bright white, similar to fluorescent lighting
- 5000K - daylight, very bright & similar to sunlight
- 6000K - cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

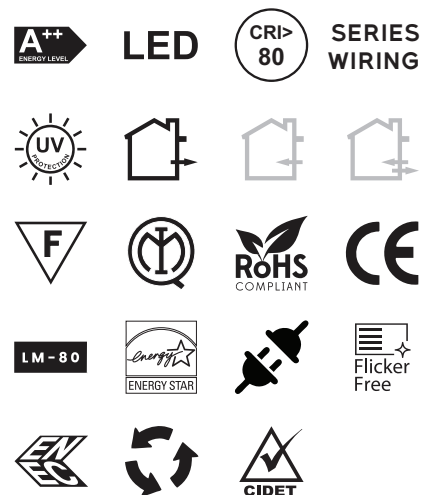

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk