




IP67 flexible LED light line with a 12mm cross section. UV resistance, chemical stability against urban gases and protection against abrasion. Vertical bending only, excellent solution for indoor/outdoor organic facade accent lighting or decorative applications requiring IP67 ingress.


Description

Housing - PCB anti-yellowing & heat resistance silicone glue extrusion chemical resistance acid.
Diffuser - Milky White Silicone
Color Available - Milky
Lifespan - >50,000 Hrs (L80 B10)
Voltage - DC 24V
Working Temperature - -20°C ~ 60°C
IP Rating - 67
IK - 08

Photometric



Technical Drawing

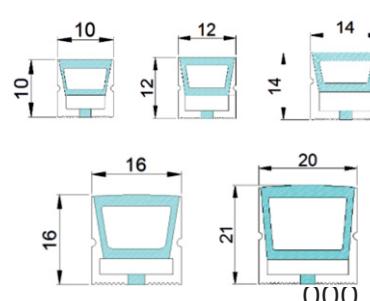

Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk