



Kelvin

2700K – warm white, similar to incandescent bulb
 3000K – soft white, similar to halogen bulb
 4000K – bright white, similar to fluorescent lighting
 5000K – daylight, very bright & similar to sunlight
 6000K – cool white, blue tinted, like a monitor



Round luminaire for installation in-ground-recessed ceiling recessed, ceiling suspended. Die-cast aluminum structure and heat sink. 316L high corrosion stainless steel outer frame. Glass diffuser: transparent with silkscreen border. Double layer coating for high resistance to corrosion: the aluminum components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminum fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint.

Description

Housing - Made of high corrosion die cast aluminum with high corrosion stainless steel 316 trim cover. sealed with silicon gasket rubber.

Diffuser - Tempered Glass

Reflector - PMMA Optical Lens

Color Available - SS 316

Lifespan - >50,000 Hours (L90 B10)

Voltage - 220~240V

Working Temperature - -20C° ~ +65C°

Accessories - Stainless Steel chain for hanging, ceiling recessed clips, ground recessed PVC Box, honeycomb, front glass for flood beam


Adjustable - Yes

IP Rating - 67


IK - 10

Item Code	Power	Lamp	Lumen	Dimensions
LP-UL657504	04W	LED	440lm	Ø135 x B126mm

Photometrics




Technical Drawing

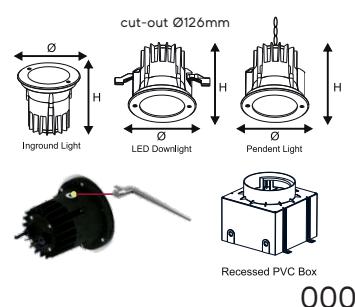

000

Beam Angle



LED CHIP



LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk