



OUTDOOR LIGHTS CHOICE

BOLLARD LIGHTS

Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


Beam Angle



LED CHIP



LED DRIVER

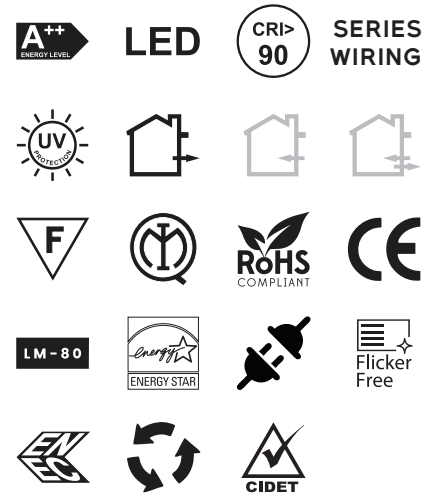

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



www.lightplus.uk



Choice Bollard Light is a great design choice for gardens, walkways and around the buildings, available with little differences in the top shape to satisfy the details lovers. The light source is an LED high efficiency system, which ensures high performances while saving energy. All the items have features like easy installation, very low maintenance needs and full safety for electrical systems and people.

Description

Housing - The body is die-cast aluminum Cover, an extruded aluminum pole. Finishing Surface: Anti-Ageing Electrostatic Powder Coating.

Diffuser - UV Stop Polycarbonate Lens

Reflector - Aluminum Reflector

Color Available - White & Black

Lifespan - >100,000 Hours (L90 B50)

Voltage - AC100-240V


Working Temperature - -40C° ~ 55C°

IP Rating - 66

IK - 08

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL365515-H80	15W	LED	1800lm	A150 X B150 X C800 mm
LP-BL365515-H100	15W	LED	1800lm	A150 X B150 X C1000 mm
LP-BL365520-H80	20W	LED	2400lm	A150 X B150 X C800 mm
LP-BL365520-H100	20W	LED	2400lm	A150 X B150 X C1000 mm

Photometrics



Technical Drawing

