



### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor


### Beam Angle



### LED CHIP



### LED DRIVER

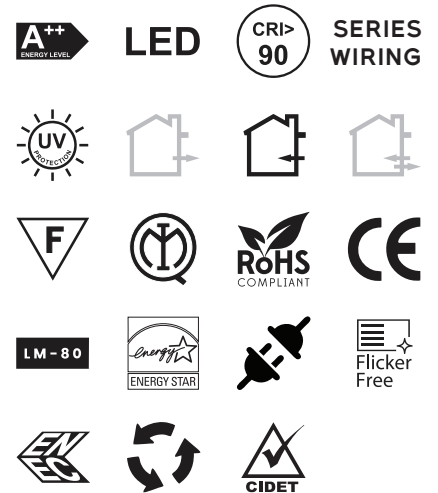

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)




Panelo II is attractive LED Panel down light for prestigious lighting of offices, banks, hotels, restaurants, corridors, foyers, sales, exhibition and conference rooms, as well as residential areas.

### Description

- Panel Light - LED - 2835, 26~28lm ( High Lumin Chip) CRI>70
- Body Material - Aluminum
- LGP - PS
- Beam Angle - 100°
- Voltage - AC180~265V Mark
- Working Temperature - -35C° ~ +65C°
- IP Rating - 40/44

Item Code	Power	Lamp	Lumen	Dimensions
L+DL-2022-7	07W	LED	700lm	100mm x 30mm
L+DL-2022-12	12W	LED	1200lm	120mm x 30mm
L+DL-2022-15	15W	LED	1500lm	145mm x 30mm
L+DL-2022-18	18W	LED	1800lm	170mm x 40mm
L+DL-2022-30	30W	LED	3000lm	225mm x 40mm

### Photometrics



### Technical Drawing

