



### Kelvin

- 2700K – warm white, similar to incandescent bulb
- 3000K – soft white, similar to halogen bulb
- 4000K – bright white, similar to fluorescent lighting
- 5000K – daylight, very bright & similar to sunlight
- 6000K – cool white, blue tinted, like a monitor

### Beam Angle



Durable LED bollard for campus paths and residential compounds. A tough polycarbonate lens and die-cast body deliver IK10 impact resistance. Symmetric and wide distributions support comfortable spacing without hotspots. Pre-wired base, anchor bolts, and concealed entry keep the finish neat.

### LED CHIP




### LED DRIVER




### Description

- Housing** - Die-Cast Aluminum and Extruded Aluminum Pole
- Diffuser** - Clear PC
- Color Available** - Black & Grey
- Lifespan** - >50,000 Hours (L90 B10)
- Voltage** - AC220-240V
- Working Temperature** - -20C° ~ +65C°
- IP Rating** - 65
- IK** - 09


Item Code	Power	Lamp	Lumen	Dimensions
LP-BL335610	10W	LED	468lm	A120 X B80 X C400 mm A120 X B80 X C650 mm A120 X B80 X C800 mm

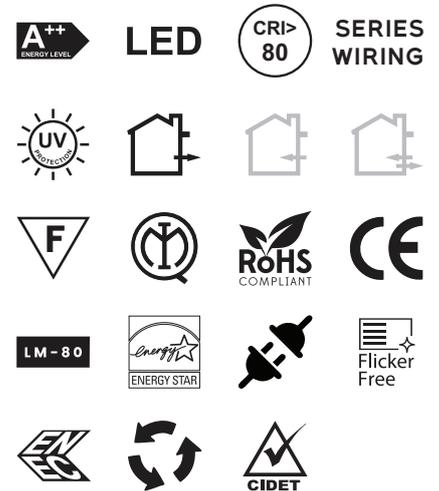

### Photometrics

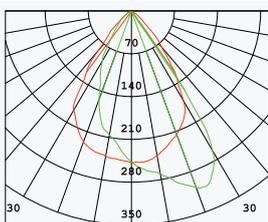

### Technical Drawing

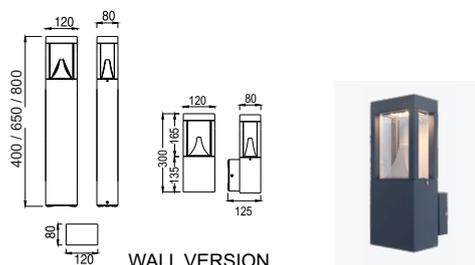

This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!

