




Reliable LED bollard for mixed-use developments and hospitality. The heavy-duty construction and UV-stable coating handle heat and sun exposure. Optional sensor packages enable dusk-to-dawn operation or presence-based dimming. All fixings are concealed for a clean finish.

## Description


**Housing** - Die-Cast Aluminum and Extruded Aluminum Pole  
**Diffuser** - Opal PC  
**Color Available** - Black & Grey  
**Lifespan** - >50,000 Hours (L90 B10)  
**Voltage** - AC220-240V  
**Working Temperature** - -20C° ~ +65C°  
**IP Rating** - 65  
**IK** - 09

Item Code	Power	Lamp	Lumen	Dimensions
LP-BL336712	12W	LED	705lm	AØ120 X C650 mm
				AØ120 X C800 mm
				AØ120 X C1000 mm

## Photometrics

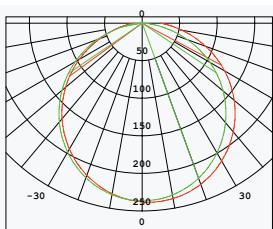

## Technical Drawing

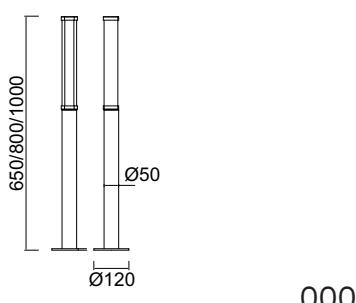

## Kelvin

2700K – warm white, similar to incandescent bulb  
3000K – soft white, similar to halogen bulb  
4000K – bright white, similar to fluorescent lighting  
5000K – daylight, very bright & similar to sunlight  
6000K – cool white, blue tinted, like a monitor

## Beam Angle



## LED CHIP



## LED DRIVER



This text is a standard disclaimer often found in product catalogs, brochures, or specification sheets. It informs customers that the company may update product specifications or materials at its discretion to improve the product, without prior notice, provided these changes do not affect its functionality. It also clarifies that the most up-to-date information is available on their website, which takes precedence over other sources.

If this is for inclusion in your materials, you might consider customizing it to match your company's policies or branding. Let me know if you'd like assistance tailoring it!



[www.lightplus.uk](http://www.lightplus.uk)